



M3018 F0, 2F0, 3F0 Harmonic Tuner (1.8-30 GHz)

DELTA TUNERS FOR HARMONIC ON-WAFER LOAD PULL


Focus Microwaves' new delta series of electro-mechanical tuners is designed specifically for high frequency on wafer measurements. The tuner's low profile allows it to be placed within the wafer perimeter and allows for a direct connection between the probe tip and the tuner, eliminating all possible insertion loss between the DUT and the tuner. This revolutionary new tuner design enables the engineer to achieve optimum tuning range, with a tuner whose footprint and weight has been dramatically reduced.



	Model	Freq. Range (GHz)	Connector Type	VSWR		Maximum Power**	Repeatability	Weight	Length
				High VSWR*	Harmonic tuning	(W, CW)	(min, dB/ typical, dB)	(lbs)	(in)
	M3018	1.8 - 30	3.5mm	50:1	10:1-100:1	47	-40/-50	27	20.6

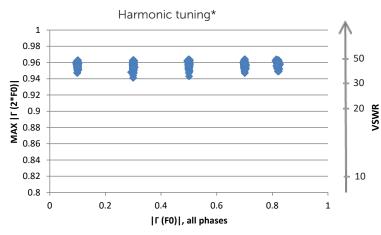


High VSWR tuning*



*measured at F0 = 3GHz

Dimensions (inches)





F@ (F

4555 Chemin du Bois-Franc, Saint-Laurent, QC. H4S 1A8, Canada T: (514) 684-4554 F: (514) 684-8581 W: www.focus-microwaves.com

For best on-wafer operation DELTA tuners are equipped by default with male connectors DUT-side and female connectors Source/Load side. Different Configurations are possible on specific customer requests

* at 30GHz (connector limited)

DS-M3018-V02



The information contained in this leaflet can change without prior notice, all rights reserved.